

## PFA 250°C 600V UL Type PFAH

Flexible UL/NEC Approved Lead Wire, Temp Rating 250°C

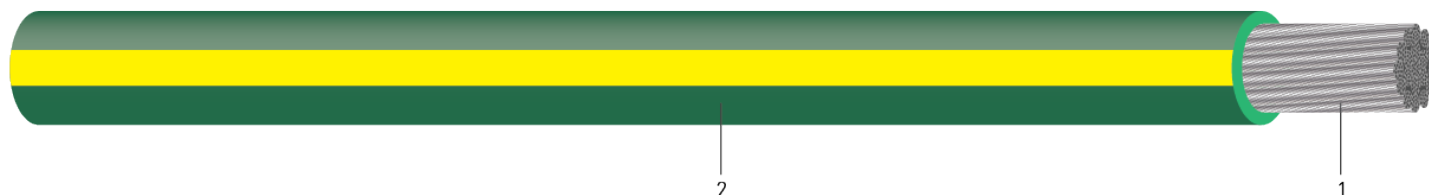


Image not to scale. See Table 1 for dimensions.

### CONSTRUCTION:

1. **Conductor:** Stranded tinned, annealed nickel plated copper per ASTM B33
2. **Insulation:** Extruded PFA fluoropolymer

### APPLICATIONS AND FEATURES:

Dry locations only. Only for leads within apparatus or within raceways connected to apparatus (nickel or nickel-coated copper only).

Excellent chemical resistance, excellent resistance to fluids, and low coefficient of friction makes installation easier. Flexible. Good mechanical strength. Available in all colors.

### SPECIFICATIONS:

- ASTM B33 Standard Specification for Tin-Coated Soft or Annealed Copper Wire
- UL AWM Appliance wire approvals as listed in Table 1
- CSA AWM I A/B FT1
- RoHS-3 Complies with European Directive 2015/863

**Table 1 – Weights and Measurements**

| Stock Number | Cond. Size<br>AWG/Kcmil | Cond. Strands<br>strand | Insul. Thickness<br>mil | Approx. OD<br>inch | Approx. Weight<br>lb/1000ft | Temp. Rating<br>°C | Standard (UL or other)<br>Style/Type |
|--------------|-------------------------|-------------------------|-------------------------|--------------------|-----------------------------|--------------------|--------------------------------------|
| CP066H       | 6                       | 133/.0141               | 30                      | 0.270              | 95                          | 250                | NEC Style PFAH                       |

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

Dimensions and weights for other cable configurations are available upon request.

**Table 2 – Weights and Measurements (Metric)**

| Stock Number | Cond. Size<br>AWG/Kcmil | Cond. Strands<br>strand | Insul. Thickness<br>mm | Approx. OD<br>mm | Approx. Weight<br>kg/km | Temp. Rating<br>°C | Standard (UL or other)<br>Style/Type |
|--------------|-------------------------|-------------------------|------------------------|------------------|-------------------------|--------------------|--------------------------------------|
| CP066H       | 6                       | 133/.0141               | 0.76                   | 6.86             | 141                     | 250                | NEC Style PFAH                       |

