

3/C CU 600V XLPE XHHW-2 ARMOR-X PVC Power Cable With Ground VFD

Type MC-HL Power Cable 600Volt Three Conductor Copper, Cross Linked Polyethylene (XLPE) insulation XHHW-2 Continuous Corrugated Welded Armor (Armor-X), Polyvinyl Chloride (PVC) Jacket with 3 Bare CU Ground

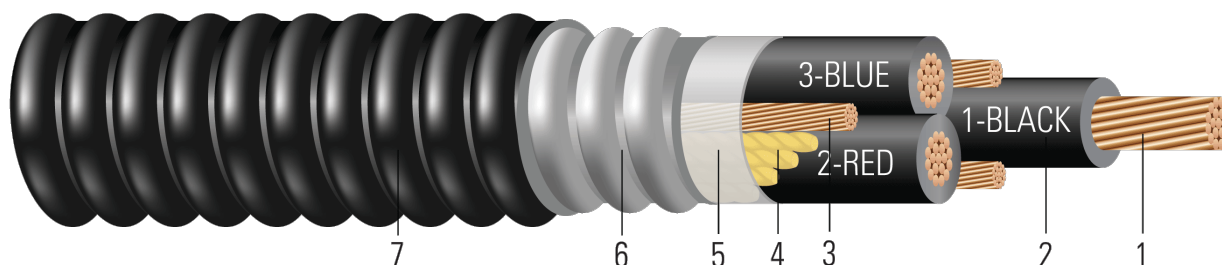


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Insulation:** Cross Linked Polyethylene (XLPE) Type XHHW-2
- Grounding Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Filler:** Paper filler (cable size 8 & 6 uses Polypropylene filler)
- Binder:** Polypropylene tape
- Armor:** Continuous Corrugated Welded Armor (Armor-X)
- Overall Jacket:** Polyvinyl Chloride (PVC) Jacket

APPLICATIONS AND FEATURES:

Southwire's 600 Volt Type MC-HL Armor-X® power cables are suited for use in wet and dry areas, conduits, ducts, troughs, trays, direct burial, aerial supported by a messenger, and where superior electrical properties are desired. These cables are capable of operating continuously at the conductor temperature not in excess of 90°C for normal operation in wet and dry locations, 130°C for emergency overload, 250°C for short circuit conditions, and -50°C for cold bend. For uses in Class I, II, and III, Division 1 and 2 hazardous locations per NEC Article 501, 502, and 503. Suitable for VFD application.

SPECIFICATIONS:

- ASTM B3 Standard Specification for Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- UL 44 Thermoset-Insulated Wires and Cables
- UL 1309 Marine Shipboard Cable
- UL 1569 Metal-Clad Cables
- UL 1685 FT4 Vertical-Tray Fire Propagation and Smoke Release Test
- ICEA S-58-679 Control Cable Conductor Identification Method 3 (1-BLACK, 2-RED, 3-BLUE)
- ICEA S-95-658 (NEMA WC70) Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy
- IEEE 1202 FT4 Vertical Tray Flame Test (70,000 Btu/hr) and ICEA T-29-520 - (210,000 Btu/hr)
- ABS Listed as CWCMC

SAMPLE PRINT LEGEND:

SOUTHWIRE EXXXXX #P# ARMOR-X (UL) [#AWG Or #kcmil] CU XHHW-2 XLPE/PVC 600V Type MC-HL For CT USE SUN. RES.
For DIRECT BURIAL FT4 [-50°C] YEAR (NESC) [SEQUENTIAL FEET MARKS]



Table 1 – Weights and Measurements

Stock Number	Cond. Size	Diameter Over Conductor	Insul. Thickness	Diameter Over Insulation	Ground	Diameter Over Armor	Jacket Thickness	Approx. OD	Copper Weight	Approx. Weight
	AWG/ Kcmil	inch	mil	inch	No. x AWG	inch	mil	inch	lb/1000ft	lb/1000ft
890517◇	2/0	0.404	55	0.514	3 x 10	1.470	50	1.570	1342	1955

All dimensions are nominal and subject to normal manufacturing tolerances

◇ Cable marked with this symbol is a standard stock item

Table 2 – Electrical and Engineering Data

Stock Number	Cond. Size	Min Bending Radius	Max Pull Tension	DC Resistance @ 25°C	AC Resistance @ 90°C	Inductive Reactance @ 60Hz	Shield Short Circuit Current 6 Cycles	Allowable Ampacity At 60°C†	Allowable Ampacity At 75°C†	Allowable Ampacity At 90°C†
	AWG/ Kcmil	inch	lb	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp	Amp	Amp
890517◇	2/0	11.0	3194	0.081	0.102	0.027	30264	145	175	195

† Ampacities are based on Table 310.15 (B)(16) of the NEC, 2017 Edition. Ampacities of insulated conductors rated up to and including 2000 Volts, based on ambient temperature of 30°C (86°F)

