

TECK 90 1000V XLPE with PVC JACKET POWER CABLE

1000V Multi Conductor, Copper, FT4 - Flame Retardancy Rating, XLPE Insulation, Aluminum Interlocked Armour, Sunlight Resistant, Direct Buried, -40°C - 90°C, Rated HL, AG14

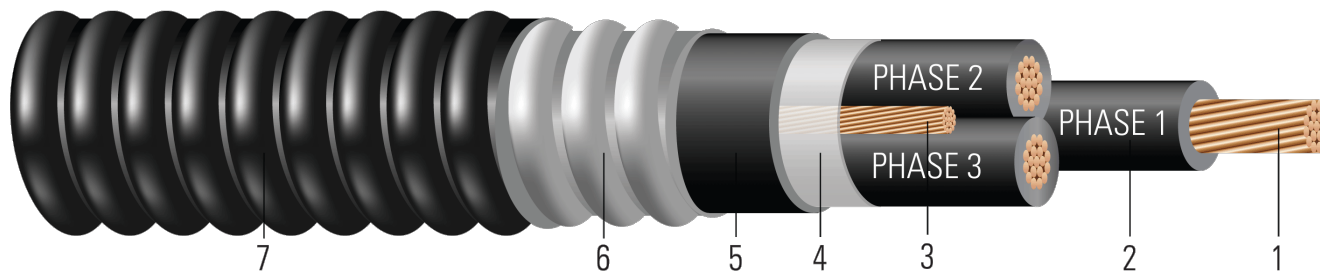


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Class B stranded copper, compressed, in accordance with ASTM B3 and B8. Sizes #1 to 4/0 are combination unilay-stranded copper conductors in accordance with ASTM B787.
- Insulation:** Cross-Linked Polyethylene (XLPE)
- Grounding Conductors:** Uninsulated Class B stranded grounding conductor
- Binder:** Mylar tape
- Inner Jacket:** Black Polyvinyl Chloride (PVC)
- Armor:** Aluminum Interlocked Armour (AIA)
- Overall Jacket:** Black PVC (optional colours available)

APPLICATIONS AND FEATURES:

For exposed or concealed wiring in wet or dry locations. For use in ventilated, non-ventilated and ladder type cable troughs and ventilated flexible cableway in wet, dry, hazardous locations or direct buried. Sunlight Resistant. Typical applications are for control, lighting and power circuits in: pulp and paper mills, steel mills, food processing plants, commercial centers, mines, generating stations, refineries, industrial plants and chemical plants.

- -40°C - CSA Cold Bend and Impact Temperature
- -40°C - Min. Installation Temperature
- 90°C - Max. Continuous Operating Temperature

SPECIFICATIONS:

- ASTM B3 Standard Specification for Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- ASTM B787 19 Wire Combination Unilay-Stranded Copper Conductors
- UL 1569 Metal-Clad Cables
- CSA C22.2 No. 131 Type TECK 90 Cable
- CSA C22.2 No. 174 Cables in Hazardous Locations
- CSA LTGG [-40°C] - as per C68.10 - for Cold Bend and Impact rating
- CSA AG14 - Acid Gas Compliance
- ICEA S-58-679 Control Cable Conductor Identification Method 3 (1-BLACK, 2-RED, 3-BLUE)
- IEEE 1202 FT4 Flame Test (70,000) BTU/hr Vertical Tray Test



Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | www.southwire.com



Southwire

**CABLETECH
SUPPORT™**

Services

SAMPLE PRINT LEGEND:

{SQMTR_DUAL} SOUTHWIRE{R} MASTER-DESIGN {CSA} LL90458 3/C XXX AWG (XX{mm2}) CU TECK 90 XLPE -40{D}C FT4 AG14 SUN. RES. 90{D}C 1000V HL --- {UL} E96627 TYPE MC XLPE 600V SUN. RES. DIRECT BURIAL 90{D}C --- {NOM}-ANCE Tipo MC XHHW-2 CT FT4 600V o 1000V 90{D}C USA

Table 1 – Weights and Measurements

Stock Number	Cond. Size	Diameter Over Conductor	Insul. Thickness	Diameter Over Insulation	Ground	Jacket Thickness	Approx. OD	Copper Weight	Approx. Weight
	AWG/ Kcmil	inch	mil	inch	No. x AWG	mil	inch	lb/1000ft	lb/1000ft
640905	350	0.661	95	0.830	1 x 3	80	2.526	3440	5028

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

* Ampacities based on not more than 3 conductors (4 with neutral) in raceway or cable as per Table 2 of 2015 Canadian Electrical Code Part 1.

Table 2 – Electrical and Engineering Data

Stock Number	Cond. Size	Min Bending Radius	Max Pull Tension	DC Resistance @ 25°C	AC Resistance @ 90°C	Inductive Reactance @ 60Hz	Shield Short Circuit Current 6 Cycles	Allowable Ampacity At 60°C†	Allowable Ampacity At 75°C†	Allowable Ampacity At 90°C†
	AWG/ Kcmil	inch	lb	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp	Amp	Amp
640905	350	17.7	8400	0.031	0.040	0.026	79583	260	310	350

