

3/C CU 2.4kV 115 EPR AIA PVC MV-105

Type MV-105 Three Conductor Copper, 115 Mils Ethylene Propylene Rubber (EPR) Aluminum Interlocked Armor (AIA), Polyvinyl Chloride (PVC) Jacket

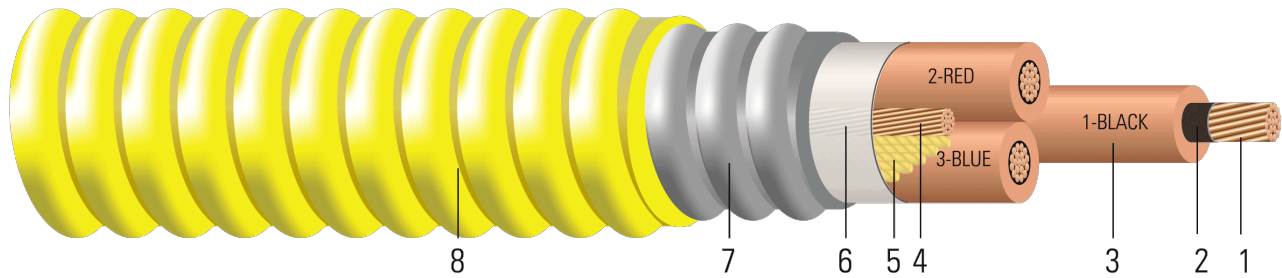


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Conductor Shield:** Semi-conducting cross-linked copolymer
- Insulation:** 115 Mils Ethylene Propylene Rubber (EPR)
- Grounding Conductor:** Class B compressed stranded bare copper ground per ASTM B3 and ASTM B8
- Filler:** Wax paper filler
- Binder:** Polypropylene tape
- Armor:** Aluminum Interlocked Armor (AIA)
- Overall Jacket:** Polyvinyl Chloride (PVC)

APPLICATIONS AND FEATURES:

Southwire's 2.4KV cables are suited for use in wet and dry areas, conduits, ducts, troughs, trays, direct burial, and where superior electrical properties are desired. These cables are capable of operating continuously at the conductor temperature not in excess of 105°C for normal operation, 130°C for emergency overload, and 250°C for short circuit conditions. Rated at -35°C for cold bend. For uses in Class I and II, Division 2 hazardous locations per NEC Article 501 and 502. Rated for 1000 lbs./FT maximum sidewall pressure.

SPECIFICATIONS:

- ASTM B3 Standard Specification for Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- UL 1072 Medium-Voltage Power Cables
- UL 1685 Vertical-Tray Fire Propagation and Smoke Release Test
- ICEA S-96-659 (NEMA WC 71) 2001-5000 V Nonshielded Cables

SAMPLE PRINT LEGEND:

{SQFTG_DUAL} SOUTHWIRE{R} POWER CABLE MASTER-DESIGN {UL} 3/C XXX AWG CU 90 MILS NL-EPR 2400V NONSHIELDED GW 1 X X AWG CU MV-105 FOR CT USE - SUN. RES. - FOR DIRECT BURIAL - WET & DRY LOC. {NESC}

Table 1 – Weights and Measurements

552212	2/0	0.405	0.665	1 x 4	60	1.778	2269	3194	12.4
--------	-----	-------	-------	-------	----	-------	------	------	------

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item



Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | www.southwire.com



Southwire

**CABLETECH
SUPPORT™**

Services

Table 2 – Electrical and Engineering Data

Cond. Size	DC Resistance @ 25°C	AC Resistance @ 90°C	Inductive Reactance @ 60Hz	Shield Short Circuit Current 6 Cycles	Allowable Ampacity Directly Buried 90/105°C [†]	Allowable Ampacity In Air 90/105°C [‡]
AWG/Kcmil	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp	Amp
2/0	0.081	0.102	0.033	30264	260/280	215/240

† Ampacities are based on TABLE 310.60(C)(83) of the 2014 National Electrical Code (20°C Ambient Earth Temperature, Thermal Resistance ROH of 90)

‡ Ampacities are based on TABLE 310.60(C)(71) of the 2014 National Electrical Code (40°C Ambient Air Temperature)

