

## 3/C CU 600V EPR XHHW-2 LSZH Power Cable With Ground

Type TC-ER Power Cable 600Volt Three Conductor Copper, Ethylene Propylene Rubber (EPR) insulation XHHW-2 SOLONON® Low Smoke Zero Halogen (LSZH) Jacket with 1 Bare CU Ground

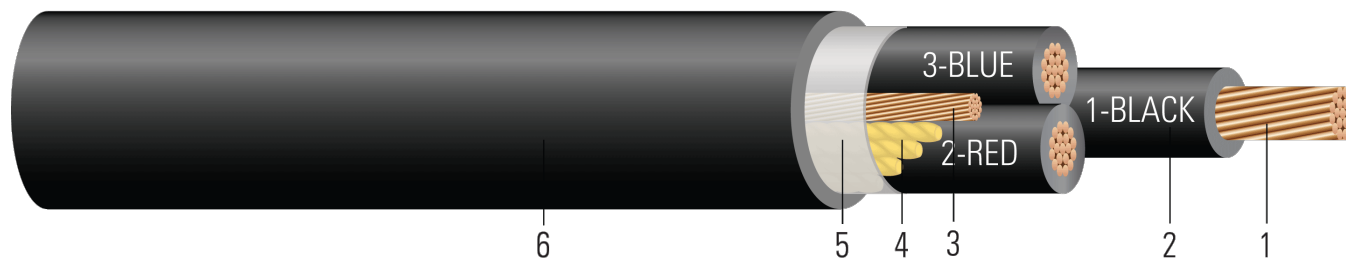


Image not to scale. See Table 1 for dimensions.

### CONSTRUCTION:

- Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Insulation:** Ethylene Propylene Rubber (EPR) Type XHHW-2
- Grounding Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8 (cable size 8 & 6 has insulated green ground)
- Filler:** Paper filler (cable size 8 & 6 uses Polypropylene filler)
- Binder:** Polyester flat thread binder tape for cable sizes larger than 2 AWG
- Overall Jacket:** SOLONON® Low Smoke Zero Halogen (LSZH) Jacket

### APPLICATIONS AND FEATURES:

Southwire's 600 Volt Type TC-ER power cables are suited for use in wet and dry areas, conduits, ducts, troughs, trays, direct burial, aerial supported by a messenger, and where superior electrical properties are desired. These cables are capable of operating continuously at the conductor temperature not in excess of 90°C for normal operation in wet and dry locations, 130°C for emergency overload, and 250°C for short circuit conditions. For uses in Class I, II, and III, Division 2 hazardous locations per NEC Article 501 and 502. Constructions with 3 or more conductors are listed for exposed runs (TC-ER) per NEC 336.10.

### SPECIFICATIONS:

- ASTM B3 Standard Specification for Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- UL 44 Thermoset-Insulated Wires and Cables
- UL 1277 Electrical Power and Control Tray Cables
- UL 1685 Vertical-Tray Fire Propagation and Smoke Release Test
- ICEA S-58-679 Control Cable Conductor Identification Method 3 (1-BLACK, 2-RED, 3-BLUE)
- ICEA S-95-658 (NEMA WC70) Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy
- NFPA 130 Standard for Fixed Guideway Transit and Passenger Rail Systems

### SAMPLE PRINT LEGEND:

{SQFTG} SOUTHWIRE{R} MASTER-DESIGN {UL} XXX KCMIL CU 3 CDRS TYPE TC-ER XHHW-2 CDRS GW 1 X 4 AWG CU SOLONON{R} 90{D}C JACKET SUNLIGHT RESISTANT DIRECT BURIAL 600 VOLTS



**Table 1 – Weights and Measurements**

Stock Number	Cond. Size	Diameter Over Conductor	Insul. Thickness	Diameter Over Insulation	Ground	Jacket Thickness	Approx. OD	Copper Weight	Approx. Weight
	AWG/ Kcmil	inch	mil	inch	No. x AWG	mil	inch	lb/1000ft	lb/1000ft
566221	500	0.789	65	0.919	1 x 2	110	2.205	4885	5886

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

**Table 2 – Electrical and Engineering Data**

Stock Number	Cond. Size	Min Bending Radius	Max Pull Tension	DC Resistance @ 25°C	AC Resistance @ 90°C	Inductive Reactance @ 60Hz	Shield Short Circuit Current 6 Cycles	Allowable Ampacity At 60°C†	Allowable Ampacity At 75°C†	Allowable Ampacity At 90°C†
	AWG/ Kcmil	inch	lb	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp	Amp	Amp
566221	500	13.2	12000	0.022	0.029	0.025	113690	320	380	430

† Ampacities are based on Table 310.15 (B)(16) of the NEC, 2017 Edition. Ampacities of insulated conductors rated up to and including 2000 Volts, based on ambient temperature of 30°C (86°F)

