

CU 600V Remote Power & Drill Cord Cable 90°C

Flexible Copper conductors, Ethylene Propylene Diene Monomer (EPDM) insulation, Extra Heavy Duty Two Layer Heavy-Duty Neoprene Jacket with Optional Reflective Stripes

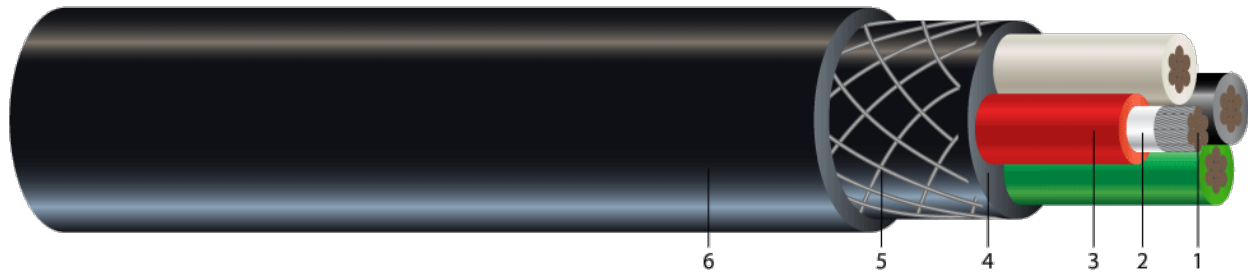


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Soft drawn, annealed, flexible, rope-lay stranded, uncoated copper per ASTM B3/B172.
- Separator Tape:** Non-conducting tape applied between the conductor and insulation to facilitate stripping
- Insulation:** Ethylene Propylene Rubber (EPR). Color coded: 3-Conductor: Black, White, Green; 4 Conductor: Black, White, Red, Green; 5-Conductor: Black, White, Red, Green, Orange; 6-Conductor: Black, White, Red, Green, Orange, Blue
- Inner Jacket:** Black, heavy-duty integral fill flame resistant, thermosetting Neoprene
- Reinforcement:** Reinforcing twine applied between the two jacket layers.
- Outer Jacket:** Black, heavy-duty, integral fill, flame resistant, thermosetting Neoprene. Alternate jacket colors available.

APPLICATIONS AND FEATURES:

Southwire's Remote Power and Drill cord cable is a heavy-duty cable for use where limited flexing and rugged use are required. For use in stationary heavy duty pumps or long-wall lighting application. Designed for long service life in wet or dry locations in underground mines. The cable is sunlight resistant, crush resistant, and abrasion resistant. Also suitable for continuous submersion in water. Embossed print legend for easy cable identification.

SPECIFICATIONS:

- ASTM B33 Standard Specification for Tin-Coated Soft or Annealed Copper Wire
- ASTM B172 Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Copper Conductors
- ICEA S-75-381 Portable and Power Feeder Cables for Use in Mines
- MSHA Approved

SAMPLE PRINT LEGEND:

AWG #/C REMOTE CONTROL & DRILL CORD 600V P-07-KA120024-MSHA --- RoHS



Southwire

**CABLETECH
SUPPORT™**

Services

Table 1 – Weights and Measurements

| Stock Number | Cond. Size | Cond. Number | Cond. Strands | Diameter Over Conductor | Insul. Thickness | Diameter Over Insulation | Approx. OD | Approx. Weight |
|--------------|---------------|--------------|---------------|-------------------------|------------------|--------------------------|------------|----------------|
| | AWG/ Kcmil | No. | No. | inch | mil | inch | inch | lb/1000ft |
| 578830 | 10 | 3 | 104 | 0.131 | 45 | 0.257 | 0.8 | 360 |

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

Table 2 – Electrical and Engineering Data

| Stock Number | Cond. Size | Cond. Number | DC Resistance @ 25°C | AC Resistance @ 90°C | Working Tension | Min Bending Radius | Allowable Ampacity In Air 90°C† |
|--------------|---------------|--------------|----------------------|----------------------|-----------------|--------------------|---------------------------------|
| | AWG/ Kcmil | No. | Ω/1000ft | Ω/1000ft | lb | inch | Amp |
| 578830 | 10 | 3 | 1.06 | 1.319 | 71 | 5 | 25 |

† Ampacity based on Tables 400.5(A)(1) of the National Electrical Code® and is for a single isolated cable in air operated with an open-circuited shield at an ambient temperature of 30°C and a conductor temperature of 90°C and three current carrying conductors



Southwire



Services